



AQUA-AEROBIC SYSTEMS, INC.

Aqua-Aerobic **Cloth Media Filters**

Aqua-Aerobic Cloth Media Filters


Aqua-Aerobic Systems revolutionized tertiary treatment by introducing cloth media disk filtration. After 20 years and over 1,000 installed units worldwide, Aqua-Aerobic continues to lead the industry in the development and application of cloth media technology. Original OptiFiber® pile cloth is the common thread utilized on all of our mechanical configurations: AquaDisk®, Aqua MiniDisk® and AquaDiamond® filters. Satisfied customers realize performance advantages, cost savings and ease of operation and maintenance compared to other tertiary filters and microscreens.

OptiFiber® Cloth Media

OptiFiber® cloth media is engineered exclusively for wastewater and water applications. It is designed to maximize solids removal over a wide range of particle sizes. Its thick, pile construction allows filtered solids to be stored, unlike microscreen media, to extend the time between backwashes. A uniquely designed cloth fiber backing support structure promotes thorough cleaning of the media for optimum performance.



OptiFiber PA2-13®



OptiFiber PES-13®

Ongoing Cloth Media Research

We remain dedicated to advancing the science of cloth media filtration through technical research. Our years of experience in cloth media development provide a unique understanding of the close relationship between cloth construction and performance. Every cloth design must pass rigorous, full-scale field testing prior to commercial implementation. The result is our ability to offer you the highest degree of confidence in achieving your specific performance objectives.




OptiFiber PES-14™



Unique backing design

OptiFiber® Pile Cloth Media Compared to Microscreen Media

Pile Cloth Media



- Depth of media provides increased solids storage
- Backing support offers durability and longer media life
- Direct media contact during backwashing for higher maximum cleaning efficiency
- Variety of application-specific cloth media available, as small as 5 micron nominal pore size

Microscreen



- Flat, no depth for solids storage
- No backing support resulting in media being vulnerable to tearing
- No direct contact with media during backwashing
- 10 micron pore size and greater

AquaDisk®


CLOTH MEDIA FILTER

Aqua-Aerobic was first in the market, in 1991, to offer a cloth media disk configuration as an alternative to conventional granular media filtration technologies. A history of exceptional operating experience and durability continues to make AquaDisk® the tertiary filter of choice.

Features and Advantages

- Vertically oriented cloth media disks reduce required footprint
- Each disk has six lightweight, removable segments for ease of maintenance
- Fully automatic PLC control system with color touchscreen Human Machine Interface (HMI)
- Low hydraulic profile
- Higher solids and hydraulic loading rates
- Low backwash rate
- Available in painted steel, stainless steel or concrete tanks
- Low life-cycle cost
- The Aqua MiniDisk® filter is designed for flows up to 0.6 MGD offering the same features as the AquaDisk

Components

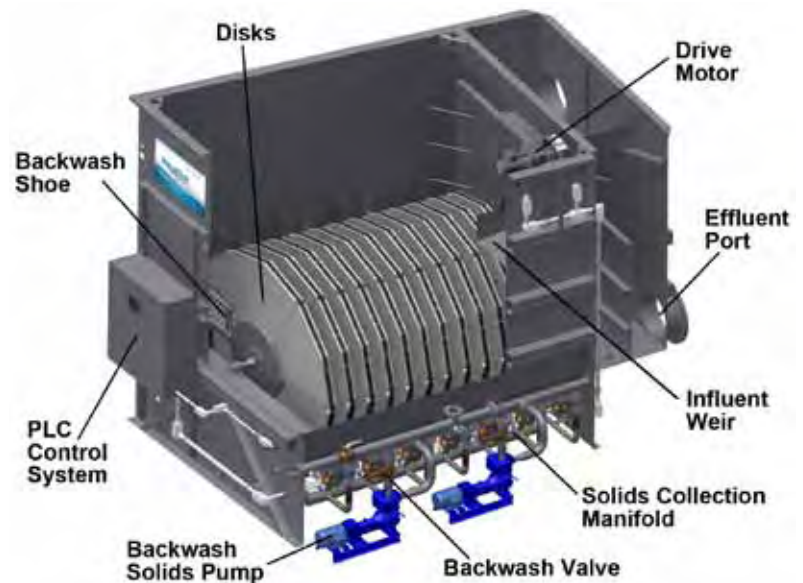

Modes of Operation




Filtration Mode

- Inlet wastewater enters filter
- Cloth media is completely submerged
- Disks are stationary
- Solids deposit on outside of cloth media forming a mat as filtrate flows through the media
- Tank liquid level rises
- Flow enters the filter by gravity and filtrate is collected inside the disks and discharged
- Heavier solids settle to tank bottom



Backwash Mode

- Solids are backwashed at a predetermined liquid level or time
- Backwash shoes contact the media directly and solids are removed by vacuum pressure of the backwash pump
- Two disks are backwashed at a time (unless a single disk is utilized)
- Disks rotate slowly
- Filtration is not interrupted
- Backwash water is directed to headworks

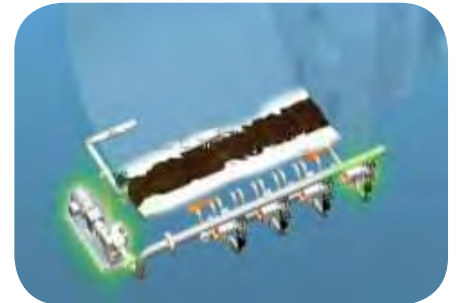

Solids Wasting Mode

- Heavier solids on the tank bottom are removed on an intermittent basis
- Solids are pumped back to the headworks, digester or other solids collection area of the treatment plant

AquaDiamond®


CLOTH MEDIA FILTER

The AquaDiamond® filter is a unique combination of two proven technologies; traveling bridge and cloth media filters. The result is two to three times the flow capacity of a traveling bridge filter within an equivalent footprint, making it ideal for sand filter retrofits.



Features and Advantages

- Up to eight vertically oriented diamond laterals per unit; available in concrete tanks
- Fits neatly into existing traveling bridge filter profile with minimal civil work
- Variable speed drive platform and backwash pump provide immediate response to influent solids excursions
- Advanced drive and tracking system prevents misalignment
- Fully automatic PLC control system with color touchscreen Human Machine Interface (HMI)
- Low hydraulic profile
- Higher solids and hydraulic loading rates
- Low backwash rate
- Components requiring maintenance are easily accessible, resulting in less maintenance costs compared to sand media filters
- Low life-cycle cost

Components

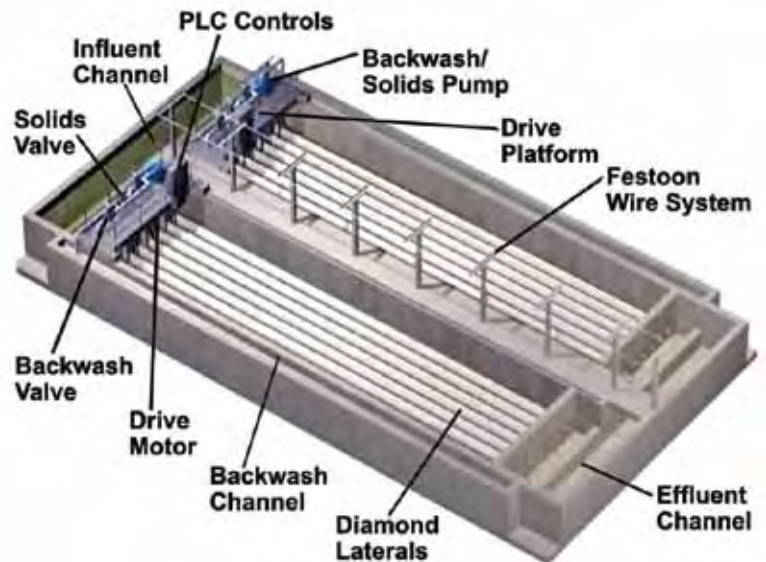

Modes of Operation

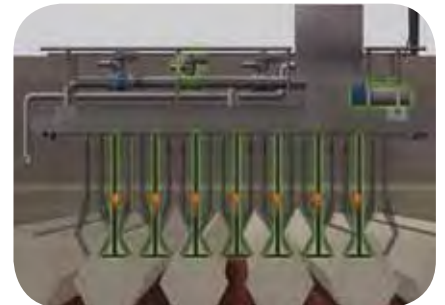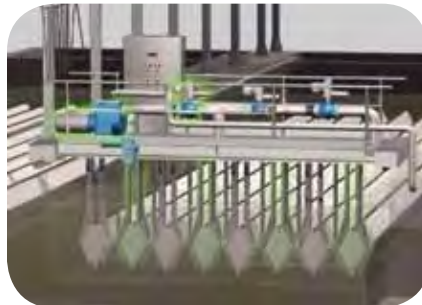

Filtration Mode

- Inlet wastewater enters the filter
- Cloth media is completely submerged
- No moving parts
- Solids deposit on outside of cloth media forming a mat as filtrate flows through the media
- Flow enters the filter by gravity and filtrate is collected inside the diamond laterals and discharged
- Heavier solids settle to basin floor

Backwash Mode

- Periodic backwashing is initiated by increased headloss due to solids deposits
- The platform traverses the length of the cloth media diamond laterals during backwashing
- Backwash shoes contact the media directly and solids are removed by vacuum pressure of the backwash pump
- The platform only operates during backwashing and solids collection

Solids Wasting Mode

- Heavier solids on the tank bottom are removed on an intermittent basis
- Small suction headers collect and discharge settled solids
- The backwash pump is utilized for solids removal.

Aqua-Aerobic Cloth Media Filters

Typical Applications



Municipal Recycle/Reuse

- 18 MGD average daily flow
- AquaDisk filters provide ≤ 2.0 NTU for stringent reuse applications.



Phosphorus Removal

- 1.5 MGD average daily flow
- AquaDisk filters provide phosphorus removal to 0.1 mg/l in a small footprint.



Traveling Bridge Filter Retrofits

- 162 MGD average daily flow
- AquaDiamond filters retrofitted into traveling bridge filter basins more than doubled the hydraulic capacity within the existing filter footprint.



Deep Bed Filter Retrofits

- 25 MGD average daily flow
- AquaDisk filters replaced sand media filters, increasing hydraulic capacity without the need for construction of new basins.



Small Flows Up To 0.6 MGD

- 0.12 MGD average daily flow
- Aqua MiniDisk® filters in steel package tanks provide reuse water for a west coast gaming facility.



Onsite Pilot Testing

- Cloth Media Filtration Pilot System provides on-site cloth media testing, analysis, and performance validation.
- Totally enclosed system includes a cloth media filter and fully equipped laboratory.

Providing **TOTAL** Water Management Solutions

Visit our website at www.aqua-aerobic.com to learn more about Aqua-Aerobic
Cloth Media Filters and our complete line of products and services:

Aeration & Mixing

Biological Processes

Membranes

Filtration

Controls & Monitoring Systems

Aftermarket Products and Services



AQUA-AEROBIC SYSTEMS, INC.

6306 N. Alpine Rd Loves Park, IL 61111-7655

p 815.654.2501 f 815.654.2508

www.aqua-aerobic.com

solutions@aqua-aerobic.com

The information contained herein relative to data, dimensions and recommendations as to size, power and assembly are for purpose of estimation only. These values should not be assumed to be universally applicable to specific design problems. Particular designs, installations and plants may call for specific requirements. Consult Aqua-Aerobic Systems, Inc. for exact recommendations or specific needs. Patents Apply.